

G40

OPERATIVE MULTIFUNCTIONAL

NOGE - Izdelane iz kovinske cevi 40 x 40 mm, debeline 1,5 mm. Lakirane z epoksidnim prašnim premazom. Nastavljive nogice iz ABS. Dvojno kolo Ø 65 mm z zavoro

PREČKE - Izdelane iz kovinske cevi 40 x 20 mm, debeline 1,5 mm. Lakirane z epoksidnim prašnim premazom.

DELOVNE POVRŠINE - Izdelane iz melamina, odpornega na madeže in praske, debeline 25 mm. Obodni ABS rob debeline 2 mm z zaobljenimi vogali.

DOSTOP DO KABLOV (TOP ACCESS) - Izdelan iz ABS, dimenzije 302 x 124 mm, popoln s škatlo za kable.

ZASTORNICA - Izdelani iz melamina, odpornega na madeže in praske, debeline 18 mm. Obodni ABS rob debeline 2 mm z zaobljenimi vogali. Kovinski nosilci debeline 3 mm v aluminijasti izvedbi. Lakirani z epoksidnim prašnim premazom.

SPREDNJE PLOŠČE / BOČNE PLOŠČE IZ PET - 100 % poliestrskih vlaken, brez kemičnih veziv, vključno s formaldehidom. Material je 100 % reciklabilen. Kovinske nosilce debelina 3 mm, aluminijasta obdelava, prašno lakiranje z epoksidno barvo.

LEGS - Made of metal tube 40 x 40 mm, 1,5 mm thick. Varnished with epoxy powder. ABS adjustable feet. Double wheel Ø 65 mm with brake.

BEAMS - Made of metal tube 40 x 20 mm, 1,5 mm thick. Varnished with epoxy powder.

DESKTOPS - Made of anti-stain and scratch-resistant melamine, 25 mm thick. Perimetral ABS edge, 2 mm thickness with rounded corners.

TOP ACCESS - Made of ABS dimension 302 x 124 mm complete of cable box.

MODESTY PANELS - Made of anti-stain and scratch-resistant melamine, 18 mm thick. Perimetral ABS edge, 2 mm thick with rounded corners. Metal brackets, 3 mm thick aluminium finish. Varnished with epoxy powder.

FRONTAL PANELS / SIDE PANELS IN PET - 100% polyester fibers, without chemical binders, including formaldehyde. 100% recyclable material. Metal brackets 3 mm thickness, aluminum finish, powder-coated with epoxy paint.

BARVNE IZVEDBE / FINISHES

KOVINSKA KONSTRUKCIJA / METAL STRUCTURES

WH



BELA
WHITE

BG



BEŽ
BEIGE

BL



ČRNA
BLACK

MIZE IN ZAŠČITNA PLOŠČA / DESKTOPS AND MODESTY PANELS

WH



BELA
WHITE

BG



BEŽ
BEIGE

OA



HRAST
OAK

DW



TEMEN OREH
DARK WALNUT

TOP ACCESS / TOP ACCESS

AL



ALUMINIJASTA
ALUMINIUM

SPREDNJA IN STRANSKA PLOŠČA IZ PET / FRONTALS AND SIDES PANELS IN PET

LG



SVETLO SIVA
LIGHT GREY

DG



TEMNO SIVA
DARK GREY

BG



BEŽ
BEIGE


GN



ZELENA
GREEN


TEHNIČNI PODATKI / TECHNICAL DATAS

DELOVNE PISALNE MIZE / OPERATIVE DESKS

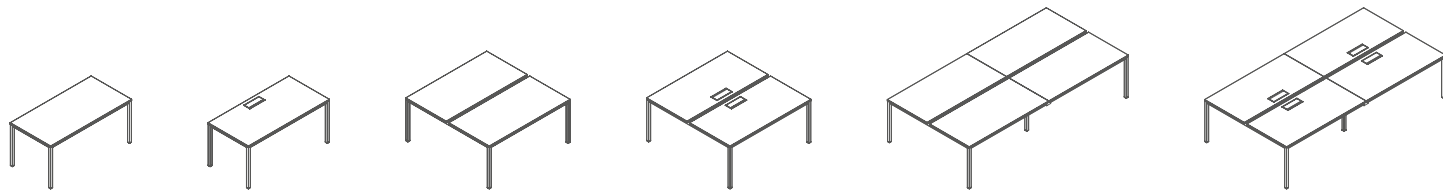


I / L = 800 - 1200 - 1400 - 1600 mm - D = 600 - 700 - 800 - 1450 - 1650 mm - V / H = 740 mm

DELOVNE PISALNE MIZE NA KOLESIH / OPERATIVE DESKS ON CASTORS

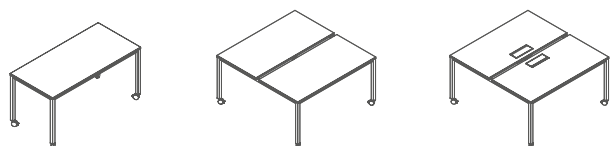


I / L = 1400 mm - D = 700 - 1450 - V / H = 740 mm

VEČFUNKCIJSKA MIZA / MULTIFUNCTIONAL TABLES

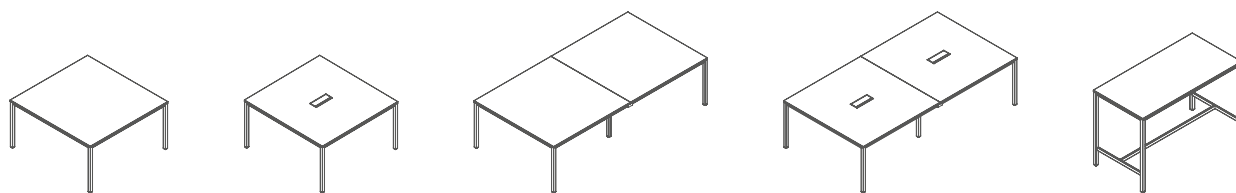


I / L = 1400 - 1600 mm - D = 700 - 1450 mm - V / H = 740 - 1050 mm

VEČFUNKCIJSKA MIZA NA KOLESIH / MULTIFUNCTIONAL TABLE ON CASTORS

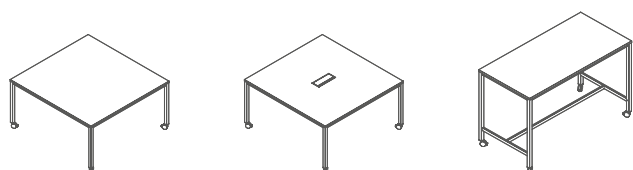

I / L = 1400 - 1600 mm - D = 700 - 1450 - V / H = 740 - 1050 mm

DODATKI / ACCESSORIES

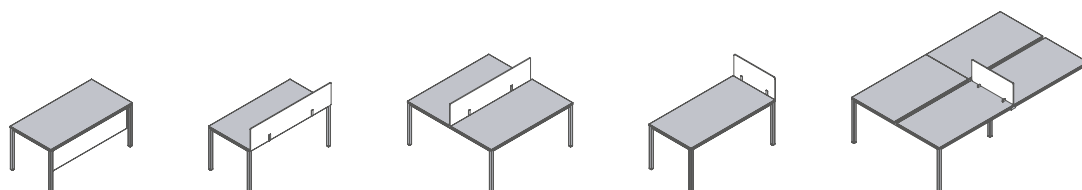

I / L = 700 - 800 - 1200 - 1400 - 1600 - D = 12 - 18 mm - V / H = 350 - 358 - 380 mm

MELAMIN

Izdelan iz 100 % recikliranih lesenih delcev in ima naslednje certifikate:

FSC (Forest Stewardship Council);

PEFC (Programme for the Endorsement of Forest Certification);

CARB Phase 2 (zelo nizke emisije formaldehida < 0,09 ppm);

MELAMINE

Made with 100% recycled wood particles and certified as follows:

FSC (Forest Stewardship Council);

PEFC (Programme for the Endorsement of Forest Certification);

CARB Phase 2 certification (very low formaldehyde emission < 0.09 ppm);

ROBNI TRAK (ABS)

100 % reciklabilen zahvaljujoč sestavi brez kislin, ki ne povzroča emisij škodljivih snovi za okolje ali človeka. Certificiran FSC.

EDGE (ABS)

100% recyclable thanks to its acid-free composition, which does not produce harmful emissions for the environment or for humans. FSC certified.

BARVE ZA KOVINSKE DELE

Uporabljene barve za kovinske dele so epoksidni praškasti premazi, zato ne vsebujejo hlapnih organskih spojin (VOC).

PAINTS FOR METAL PARTS

The paints used for metal components are epoxy powder coatings, therefore free of volatile organic compounds (VOCs).

PET

Plošča iz PET filca je izdelana iz 100 % poliestrskih vlaken, brez kemičnih veziv, vključno s formaldehidom.

Vsaj 70 % teh vlaken je pridobljenih iz recikliranih PET steklenic (približno 70 PET steklenic na m²).

PET plošča je 100 % reciklabilna.

Gostota: 2400 g/m².

Koeficient absorpcije zvoka (NRC): 0,80 (material absorbira 80 % zvoka in 20 % odbije).

Ognjevarna klasifikacija: EN 13501-1:2007+A1:2009, razred B.

Emisije hlapnih organskih spojin (VOC): < 0,005 mg/m²/h, merjeno po metodi ASTM D5116.

Emisije formaldehida: < 0,1 mg/L, merjeno po standardu AS/NZS 4266.16:2004.

PET

The PET Felt Panel is made of 100% polyester fibers, without chemical binders, including formaldehyde.

At least 70% of these fibers are obtained from recycled PET bottles (approximately 70 PET bottles per m²).

The PET panel is 100% recyclable.

Density: 2400 g/m².

Noise Reduction Coefficient (NRC): 0.80 (the material absorbs 80% of sound and reflects 20%).

Fire rating: EN 13501-1:2007+A1:2009, Class B. VOC (Volatile Organic Compounds) emissions: < 0.005 mg/m²/h, measured according to ASTM D5116.

Formaldehyde emissions: < 0.1 mg/L, measured according to AS/NZS 4266.16:2004.